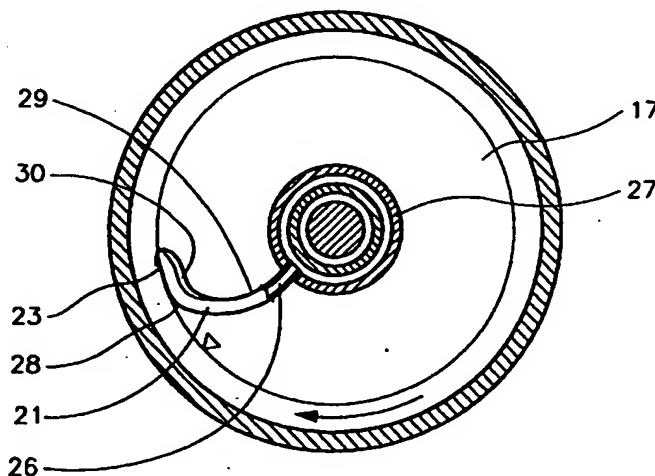




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B04B 11/02</b>	<b>A1</b>	(11) International Publication Number: <b>WO 95/29013</b> (43) International Publication Date: <b>2 November 1995 (02.11.95)</b>
(21) International Application Number: <b>PCT/SE95/00437</b> (22) International Filing Date: <b>20 April 1995 (20.04.95)</b> (30) Priority Data: <b>9401354-7</b> <b>21 April 1994 (21.04.94)</b> <b>SE</b> (71) Applicant (for all designated States except US): <b>TETRA LAVAL HOLDINGS &amp; FINANCE S.A. [CH/CH]; Avenue Général-Guisan 70, CH-1009 Pully (CH).</b> (72) Inventors; and (75) Inventors/Applicants (for US only): <b>BORGSTRÖM, Leonard [SE/SE]; Rönnbärsvägen 8, S-135 42 Tyresö (SE). BREHMER, Patrik [SE/SE]; Näsbydalsvägen 8, S-183 31 Täby (SE). CARLSSON, Claes-Göran [SE/SE]; Skogshemsvägen 63 B, S-146 36 Tullinge (SE). FRANZÉN, Peter [SE/SE]; Månstorpssvägen 22, S-146 35 Tullinge (SE). INGE, Claes [SE/SE]; Kristinavägen 15, S-131 50 Saltsjö-Duvnäs (SE). LAGERSTEDT, Torgny [SE/SE]; Döbelnsgatan 89, S-113 52 Stockholm (SE). MOBERG, Hans [SE/SE]; Björngårdsgatan 16B, S-118 52 Stockholm (SE).</b> (74) Agent: <b>CLIVEMO, Ingemar; Alfa Laval AB, S-147 80 Tumba (SE).</b>	(81) Designated States: <b>BR, CN, JP, RU, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</b> Published With international search report.	

(54) Title: CENTRIFUGAL SEPARATOR



## (57) Abstract

Centrifugal separator comprising a rotor, which forms an inlet and an outlet chamber (17) surrounding the rotational axis, in which a liquid present therein rotates around the rotational axis with a radially inwardly directed free cylindrical liquid surface. A stationary discharge device (21) extends in the outlet chamber (17) from the rotating liquid body radially inwardly to a central outlet (25) and forms a flow channel (26) with an inlet opening (23). In order to reduce the splashing around the discharge device (21) and reduce the danger of air admixture the discharge device (21) has a front contour (28) projected in a plane perpendicular to the rotational axis and directed towards the rotational direction and a rear contour (29) projected in this plane and directed in the rotational direction, which contour (28, 29) seen radially outwardly has a directional component in the rotational direction, the front contour (28) being so curved in said plane at the free liquid surface that it essentially has the same direction as the free liquid surface nearby and radially outside the free liquid surface.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

Centrifugal separator

The present invention concerns a centrifugal separator comprising a rotor, which is rotatable in a predetermined rotational direction around a rotational axis, and which forms an inlet for the liquid, which is to be centrifugally treated, and an outlet chamber for liquid separated in the rotor. The outlet chamber, which surrounds the rotational axis, is so designed that liquid present in the outlet chamber during operation forms a liquid body rotating around the rotational axis, the liquid body having a radially inwardly directed free liquid surface at a wanted radial level in the rotor. The centrifugal rotor also comprises a stationary discharge device, which is arranged in the outlet chamber and extends from the rotating liquid body radially inwardly to a central outlet. Inside itself the discharge device forms a flow channel with an inlet opening, which radially is located in the area where the free liquid surface is located during operation. During operation the inlet opening is located at least partly in the liquid body and via the flow channel the inlet opening is connected to the central outlet. The discharge device has a front contour projected in a plane perpendicular to the rotational axis and directed towards the rotational direction and a rear contour projected in this plane and directed in the rotational direction.

Seen radially outwardly the contour of the discharge device in known separators of this kind are often directed towards the rotational direction, the inlet opening being directed towards the rotational direction. Hereby, you can obtain a high pressure in the liquid discharged through the outlet. However, surfaces of the

discharge device, which during operation is located in the rotating liquid body and is directed towards the rotational direction, causes a considerable splashing of the separating liquid in the outlet chamber, which  
5 results in a great energy consumption and a great danger that the air or gas, which during operation is located radially inside the free liquid surface is entrained by the liquid, which leaves the outlet chamber through the flow channels in the discharge device.

10

Some liquid drops splashing around the discharge device are entrained in the rotation of the co-rotating air or gas volume radially inside the free liquid surface and are deposited onto the outside of the stationary  
15 discharge device. Along the outside of the discharge device liquid flows radially inwardly towards central parts of the discharge chamber where liquid might flow through central openings into another outlet chamber for another component separated out of the supplied liquid,  
20 which must not be contaminated by the separated liquid.

In a centrifugal separator known from EP A1 0 058 353 the discharge device is designed as a wing, which with internal flow channels extends radially outwardly into  
25 the rotating liquid body in such a way that a flow of liquid may take place along the discharge device with a relatively small flow resistance. By designing the discharge device in this manner the splashing of the separated liquid around the discharge device decreases  
30 and, thereby, the danger that air or gas is entrained in the flow of the separated liquid out of the separator decreases. However, the surfaces of the discharge device directed towards the rotational direction result in that quite a lot splashing takes place during operation  
35 around the discharge device in spite of this design of

the discharge device and that the danger of having air or gas admixed into the separated liquid also out of this centrifugal separator is relatively great.

5 One object of the present invention is to accomplish a centrifugal separator of the kind initially described, in which the above described splashing around the discharge device is slight and the danger of having air or gas entrained by the flow of the separated liquid out-  
10 of the centrifugal separator is low, and in which the separated liquid can be discharged at low energy consumption. Another object of the invention is to accomplish a centrifugal separator, in which liquid does not flow radially inwardly along the outside of the  
15 discharge device so that the danger of having it passing into another outlet chamber for another component separated out of the supplied liquid, which component must not be contaminated by the separated liquid, is reduced or eliminated.

20

This is accomplished according to the present invention by a centrifugal separator of this kind having a discharge device, the front and rear contour of which in a plane essentially perpendicular to the rotational axis  
25 seen radially outwardly has a directional component in the rotational direction along essentially their whole extensions, the front control being so curved at the free liquid surface in said plane that it nearby and radially outside the free liquid surface essentially is  
30 directed in the rotation direction.

Hereby, the separated liquid in the rotating liquid body is brought to follow the outside of the discharge device gently and the splashing around the discharge device is  
35 strongly reduced and the above mentioned radially

inwardly directed flow of liquid, which is located on the outside of the stationary discharge device radially inside the free liquid surface, is counteracted by the contact with the rotating air or gas flow radially inside the free liquid surface.

In a preferred embodiment the contours are so curved in said plane that their directional component in the rotational direction increases by increasing radius.

10

In a special embodiment the inlet opening has an extension in the rotation direction and is delimited and surrounded by an edge, which upstream has a front edge portion and downstream has a rear edge portion, at least the rear edge portion being located during operation radially outside the free liquid surface and a straight line drawn through said edge portions forms an angle with a tangent to the free liquid surface at the inlet opening, the vertex of the angle being directed in the rotational direction and the angle being greater than 20° but smaller than 50°.

20

With advantage at least the portion of the discharge device, which forms the inlet opening, is arranged radially movable in such a way that the radially position of the inlet opening can be varied.

25

In the following the invention will be described more closely with reference to the attached drawings, in which

30

figure 1 schematically shows an axial section through a part of a centrifugal separator according to the invention,

figure 2 shows a section along the line II-II in figure 1, and

figure 3 shows an embodiment of a detail in figure 2.

5

In figure 1 there is shown a part of a centrifugal separator comprising a rotor, which has a lower part 1 and an upper part 2, which are joined together axially by means of a locking ring 3. Inside the rotor there is  
10 arranged an axially movable valve slide 4. This valve slide 4 delimits together with the upper part 2 a separation chamber 5 and is arranged to open and close an outlet passage between the separation chamber 5 and the outlet opening 6 to letting out intermittently a  
15 component, which has been separated from a mixture supplied to the rotor and being collected at the periphery of the separation chamber 5. The valve slide 4 delimits together with the lower part 1 a closing chamber 7, which is provided with an inlet 8 and a  
20 throttled outlet 9 for a so called closing liquid. During the rotation of the rotor the valve slide 4 is pressed by the pressure from the closing liquid present in the closing chamber 7 during influence of the centrifugal force into sealing abutment against a gasket  
25 10 arranged in the upper part 2.

Inside the separation chamber 5 a disc stack 11 consisting of a number of conical separation discs is arranged between a distributor 12 and a top disc 13. In  
30 the example shown in figure 1 the rotor is mounted on a hollow shaft 14, through which the liquid to be centrifugally treated is supplied to the rotor. The top disc 13 forms at its in the figure shown upper end a centrally located first outlet chamber 15 for a specific  
35 lighter liquid component separated in the separation

chamber 5. This first outlet chamber 15 communicates with the separation chamber 5 via a first overflow outlet 16, over which the specific lighter liquid component can flow out of the separation chamber 5.

5

The upper part of the rotor 2 forms a centrally located second outlet chamber 17, into which a specific heavier liquid component can flow from a radially outer portion of the separation chamber 5 via a passage 18 and a second overflow outlet 19.

10

In each outlet chamber there is arranged a stationary discharge device, a first discharge device 20 and a second discharge device 21. These discharge devices are provided with peripheral inlet openings, first inlet openings 22 and second inlet openings 23, respectively, which are connected to central outlets, a first outlet 24 and a second outlet 25, respectively. The discharge devices 20 and 21 extend mainly perpendicular towards the rotational axis radially so far out that they during operation partly are located in a rotating liquid body located in the outlet chamber 15, 17, respectively.

15

20

The design of the second discharge device 21 is disclosed more closely by the section along the line II-II in figure 1 shown in figure 2. In the outlet chamber 17 the discharge device 21 extends with the flow channel 26 formed in the same from the free liquid surface, which in the figure is marked with a triangle, radially inwardly to the interior of an outlet tube 27.

25

30

At the free liquid surface the discharge device has an inlet opening 23, through which a liquid separated during operation and in the outlet chamber 17 rotating liquid can be discharged out of the outlet chamber 17.

35

The rotational direction of the rotor, the rotating liquid body and the entrained air or gas flow is shown by the arrow drawn in the figure. Toward the rotation direction the discharge device 21 has a front contour 28 in a plane essentially perpendicular to the rotational axis and in the rotation direction the discharge device 21 has a rear contour 29 in this plane. Seen radially outwardly the contour 28 and 29 have a directional component in the rotational direction along essentially their whole extensions.

Along at least a portion of the rear contour 29 the discharge device has a fin 30, which extends radially along the discharge device 21 and in the rotation direction. This fin 30 increases the stiffness of the discharge device and has a stabilizing influence on the rotating and/or gas flow in the outlet chamber 17.

In figure 3 there is shown a preferred embodiment of a radially outer portion of a discharge device 31 according to the invention. According to this embodiment the discharge device 31 has an inlet opening 32, which upstream is delimited by a front edge portion 33 and downstream is delimited by a rear edge portion 34. At least the rear edge portion 34 is located during operation radially outside the free liquid surface. A drawn straight line 35 connecting these edge portions 33 and 34 forms an angle  $V$  with a tangent to the free liquid surface at the inlet opening 32. This angle has the vertex directed in the rotational direction and is greater than  $20^\circ$  but smaller than  $50^\circ$ . The inlet opening then constitutes an interruption of the front contour of the discharge device, which still nearby and radially outside the free liquid surface essentially is directed in the rotational direction.

The centrifugal separator shown in the figures works in the following manner:

In connection with the starting of a centrifugal separator of this kind and bringing the rotor to rotate the separation chamber 5 is closed by supplying a closing liquid to the closing chamber 7 through the inlet 8. As soon as the separation chamber 5 is closed the liquid mixture, which is to be centrifugally treated, is supplied to the separation chamber 5 through the hollow shaft 14. When the rotor has reached the rotational speed of operation and the separation chamber 5 has been filled up, the components contained in the liquid mixture are separated by the influence of centrifugal forces acting on the same. The separation is then mainly taking place in the intermediate spaces between the conical discs in the disc stack 11. During separation a specific heavier liquid component is thrown radially out towards the periphery of the separation chamber 5 where it is accumulated, while a specific lighter liquid component flows radially inwards in these intermediate spaces.

If the centrifugally treated liquid mixture also contains specific heavy particles these are accumulated at the outermost periphery of the separation chamber 5.

The specific lighter liquid component flows over to the first outlet chamber 15 via the first overflow outlet 16, which, thereby, will be determining for the radially level of the free liquid surface in the separation chamber 5. The light liquid component is discharged under pressure out of the centrifugal rotor through a first outlet 24 via the first stationary discharge

device 20, which in this case consists of a conventional pairing disc.

The specific heavier liquid component, which has been  
5 accumulated at the periphery of the separation chamber  
5, flows radially inwards through the passage 18 and  
further via the overflow outlet 19 into the outlet  
chamber 17. Herein it forms a cylindrical liquid body  
, which is kept in rotation. During operation the second  
10 discharge device 21 extends radially so far out in the  
second outlet chamber 17 that a minor part thereof is  
immersed in the rotating liquid body. However, such a  
great portion of the discharge device 21 is immersed in  
the rotating liquid body that at least a part of the  
15 inlet opening 23 or 32 is located in the rotating  
liquid. Hereby, the friction between the outside of the  
second discharge device 21 and the rotating liquid body  
is low. Through the second discharge device 21 the  
specific heavier liquid component is discharged under  
20 pressure out of the centrifugal separator through a  
second outlet 25.

In the example shown in figure 1 the discharge device 21  
is arranged to discharge during operation a separated  
25 specific heavier liquid component. Of course, a  
discharge device 21 designed according to the present  
invention within the scope of the invention  
also can be arranged to discharge a separated specific  
lighter liquid component.

Claims

## 1. Centrifugal separator comprising

- 5     -     a rotor, which is rotatable in a predetermined  
          rotational direction around a rotational axis and  
          which forms an inlet for the liquid, which is to be  
          centrifugally treated, and an outlet chamber (17)  
10       for a liquid separated in the rotor, the outlet  
          chamber (17) surrounding the rotational axis and  
          being so designed that liquid present in the outlet  
          chamber (17) during operation forms a liquid body,  
          which has a radially inwardly directed free liquid  
15       surface at a wanted radial level in the rotor,  
          rotating around the rotational axis, and
- a stationary discharge device (21) arranged in the  
          outlet chamber (17), which extends from the rotating  
          liquid body radially inwardly to a central outlet  
20       (25) and inside itself forms a flow channel (26)  
          with an inlet opening (23,32), which radially is  
          located in the area where the free liquid surface is  
          located during operation, and which during operation  
          at least partly is located in the liquid body and  
25       via the flow channel (26) is connected to the  
          central outlet (25), and which discharge device (21)  
          has a front contour (28) projected in a plane  
          perpendicular to the rotational axis and directed  
          towards the rotational direction and a rear contour  
30       (29) projected in this plane and directed in the  
          rotational direction,

c h a r a c t e r i z e d   i n

that the contours (28,29) seen radially outwardly has a directional component in the rotational direction along essentially their whole extensions, the front contour (28) being so curved in said plane at the free liquid surface that it nearby and radially outside the free liquid surface essentially is directed in the rotational direction.

2. Centrifugal separator according to claim 1, characterized in that the rear contour (29) is so curved in said plane that the direction component of it in the rotational direction increases by increasing radius.

3. Centrifugal separator according to claim 1 or 2, characterized in that the front contour (28) is so curved that the directional component of it in the rotational direction increases by increasing radius.

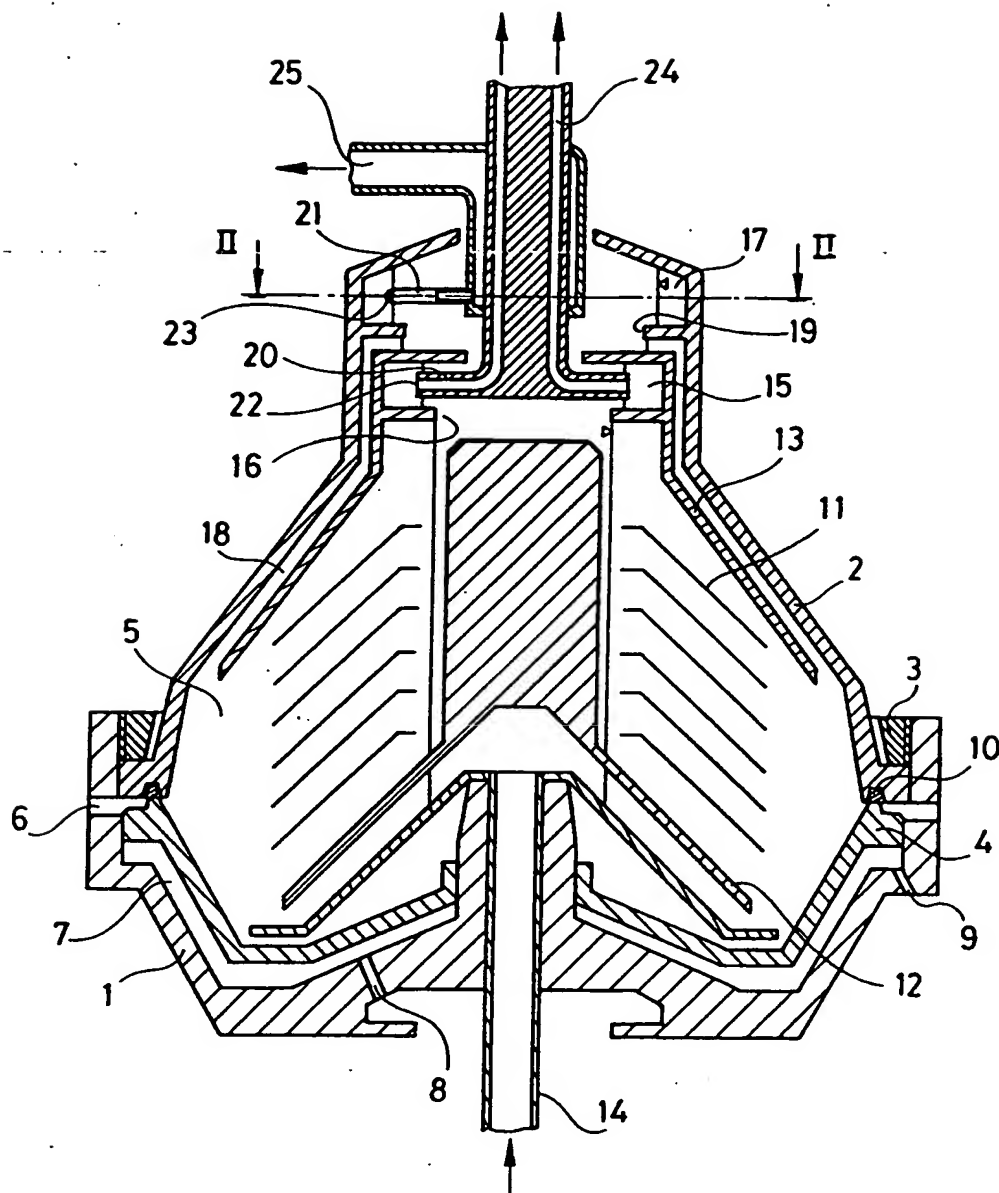
4. Centrifugal separator according to any of the previous claims, characterized in that the inlet opening (23,32) has an extension in the rotational direction.

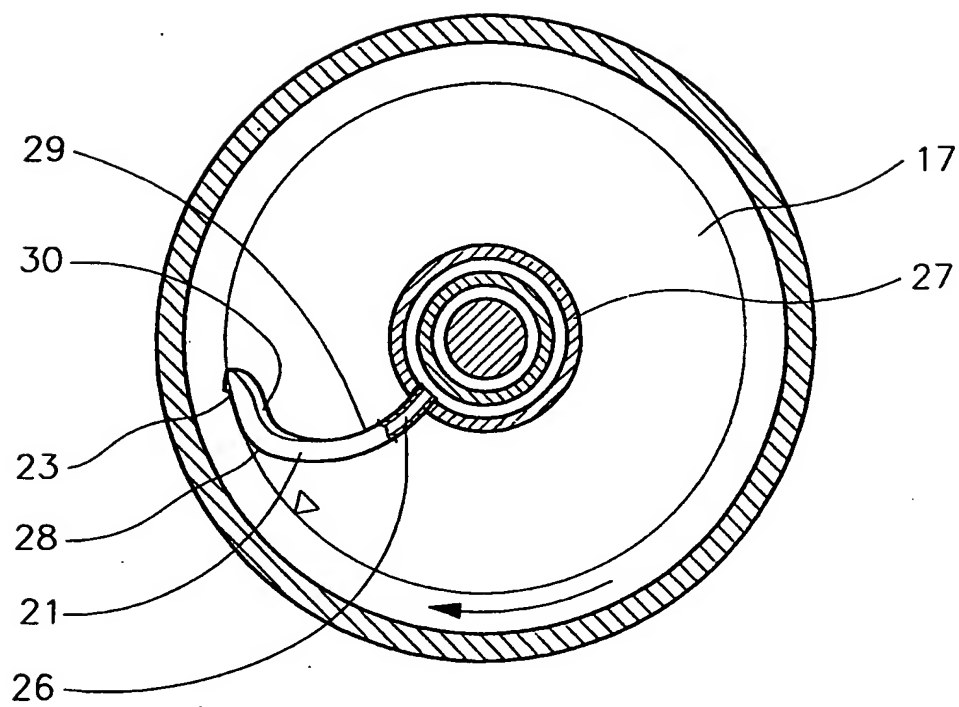
5. Centrifugal separator according to claim 4, characterized in that the inlet opening (32) is delimited and surrounded by an edge, which upstream has a front edge portion (33) and downstream has a rear edge portion (34), at least the rear edge portion (34) being located during operation radially outside the free liquid surface and a straight line (35) drawn through said edge portions (33,34) forms an angle (V) with an tangent to the free liquid surface at the inlet opening (32), which angle (V) has the vertex

directed in the rotational direction and is greater than 20° but less than 50°.

6. Centrifugal separator according to any of the  
5 previous claims, characterized in that  
at least a portion of the discharge device (21,31),  
which forms the inlet opening (23,32) is arranged  
radially movable in such a way that the radial position  
of the inlet opening (23,32) can be varied.

1 / 3

Fig.1

Fig.2



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/00437

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B04B 11/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR 729321 A (M. PAUL-JOSEPH THEVARD), 8 February 1934 (08.02.34), page 3, column 1, line 16 - column 2, line 4, figure 2 —	1
A	DE 3940053 A1 (KRAUSS-MAFFEI AG), 6 June 1991 (06.06.91), figure 2 —	1
A	FI 52029 B (BRAGE ENGSTRÖM), 28 February 1977 (28.02.77), figures 3,4 —	1
A	EP 0058353 A1 (AGFA-GEVAERT AKTIENGESELLSCHAFT), 25 August 1982 (25.08.82), figure 4 — -----	1

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 July 1995

Date of mailing of the international search report

09-08-1995

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Igor Schaber  
Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

29/05/95

International application No.

PCT/SE 95/00437

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR-A- 729321	08/02/34	NONE	
DE-A1- 3940053	06/06/91	EP-A, A, A 0431427 JP-A- 3181346 US-A- 5090953	12/06/91 07/08/91 25/02/92
FI-B- 52029	28/02/77	NONE	
EP-A1- 0058353	25/08/82	DE-A- 3105914 JP-C- 1566811 JP-A- 57153705 US-A- 4908048	09/09/82 25/06/90 22/09/82 13/03/90